

# WIREFLOW

Design by Arik Levy.

## Reference

**0338.**

## Application

Hanging lamps

## Installation type

Surface

## Description

Wireflow designed by Arik Levy. Linear hanging lamp. Its appearance, as a structure of fine cables finished with six 4,5W LED terminals, is ideal for discretely connecting with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements. Ideal for decorating large spaces, particularly ones with high ceilings, including hotel reception areas, retail sales points and food and drinks bars.

## Diffuser

Polycarbonate diffuser

## Materials


Body: Aluminum  
Horizontal rods: Steel  
Ceiling rose: Aluminum

## Finish



**0338-04** Black (RAL 9005)

## Sketch



## Electrical characteristics

6 x LED 4,5W 350mA

Total 26.9 W



# VIBIA



**Light source:** 2700K CRI >80 2942 lm 109 lm/W

**Fixture:** 1180 lm 43.7 lm/W

**Driver included:** CC - Constant Current 350 mA 110-240V 50/60Hz

**Electronic dimming** 1-10V Push

**ficha.fichatecnicaproducto.regulacion.opcional DALI**

## Technical characteristics

- Linear canopy

## Physical characteristics

1 Box / 0.08 x 0.20 x 2.30 m. / Vol. 0.0345 m<sup>3</sup> /

Gross weight 9.2 kg. / Net weight 8.3 kg.


## Installation and assembly

Please, see the installation manual

## Light distribution

### Highlight

Lamp used to highlight a specific element.



## Photometric data

Efficiency : 40.10%

Coordinate system : CG

Total flux : 2941.60 lm

Maximum value : 55.38 cd/klm


Light position : C=50.00 G=50.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

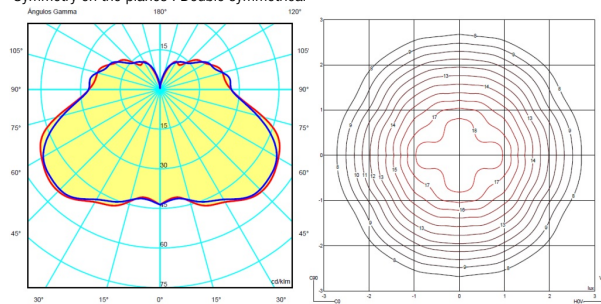

## Certificates

