



# FLORIDA

## PRODUCT SHEET







REF. 10190

### FEATURES


- IP: 33
- Installation: Pendant
- High: 114 mm
- Light Direction: Fixed
- Minimum distance to lightened objects: 0.5 m
- Lamps : LED
- Protection class: Class I
- Maximum cable length: 3000 mm
- Indirect light: Optional

### LED MODULES

- Energy efficiency : A+
- Driver: Included
- Life time: 50.000h
- LED working constant current: 700mA
- Color rendering current: CRI ≥80
- LED Guarantee: 5 years

REF		3000K/4000K
10190.05	   114 ø 450	45,6 W 4900/5000 lm
10190.06	   114 ø 650	109,2 W 11760/12000 lm
10190.07	   114 ø 950	200,2 W 21560/22000 lm
10190.08	   114 ø 1250	318,6 W 34300/35000 lm


### FINISH

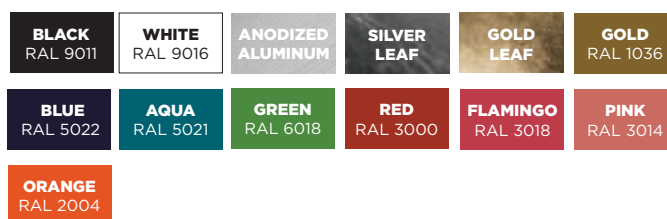

### OPTIC COVER



OPAL



MICROPRISMATIC

### DIMMABLE OPTIONS

1.10V

PUSH

DALI

### CONNECTION BASE

CB03





Date: \_\_\_\_\_

Company: \_\_\_\_\_

Project: \_\_\_\_\_

Quantity: \_\_\_\_\_

Features: \_\_\_\_\_

\_\_\_\_\_



Partida Madrigueres Sud 11  
03700 DENIA (Alicante) SPAIN  
TEL.0034-965 781 218

[www.bpmlighting.com](http://www.bpmlighting.com)